


SCAFFOLD SCREW EYE

HEC



CONCRETE
SOLID BRICK



FEATURES

Material:

Zinc plated steel


Advantage:

- Conform to DIN7998
- Zinc plating gives good protection against corrosion
- Double welded eyelet, internal diameter 23mm

APPLICATIONS EXAMPLES

- Scaffolding anchor for solid materials, (concrete, natural stone, masonry, stone) for use with 14mm plug (see below)
- Can be fixed directly into wood

DIMENSIONS

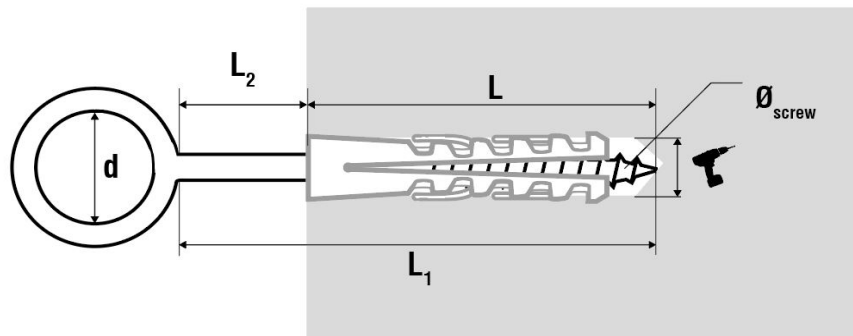

\varnothing_{vis}	L	L ₁	L ₂	d	Reference
Diameter	Piton length mm	Piton length mm	Piton length mm	\varnothing eyelets mm	
Ø12	75	90	15	23	HEC12090
		120	45	23	HEC12120
		160	85	23	HEC12160
		190	115	23	HEC12190
		230	155	23	HEC12230
		300	225	23	HEC12300
		350	275	23	HEC12350

COMPLEMENTARY PRODUCT

Nylon plug for scaffold screw eye



$\varnothing \times L$	τ	\varnothing_{screw}	Reference
Diameter	\varnothing Thickness mm	mm	
14 x 75	14	10.0-12.0	DSC14
14 x 100	14	10.0-12.0	DSC14100
14 x 135	14	10.0-12.0	DSC14135