


JOBBER DRILL BITS



JOBBER DRILLS

ROLLED HIGH SPEED STEEL STRAIGHT SHANK SPLIT POINT 118°
DIN 338 & BS 328

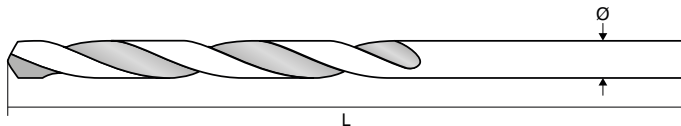

Ø			Ø			Ø			Ø		
Inch	mm	L mm	Inch	mm	L mm	Inch	mm	L mm	Inch	mm	L mm
1/64	0.4	20	3.7	70			7.0	109	13/32	10.3	133
	0.5	22	3.8	75		9/32	7.1	109		10.4	133
	0.6	24	3.9	75			7.2	109		10.5	133
	0.7	28	5/32	4.0	75		7.3	109		10.6	142
1/32	0.8	30		4.1	75		7.4	109	27/64	10.7	142
	0.9	32		4.2	75	19/64	7.5	109		10.8	142
	1.0	34		4.3	80		7.6	117		10.9	142
	1.1	36	11/64	4.4	80		7.7	117		11.0	142
3/64	1.2	38		4.5	80		7.8	117	7/16	11.1	142
	1.3	38		4.6	80	5/16	7.9	117	29/64	11.5	142
	1.4	40		4.7	80		8.0	117	15/32	11.9	151
	1.5	40	3/16	4.8	80		8.1	117		12.0	151
1/16	1.6	43		4.9	86		8.2	117	31/64	12.3	151
	1.7	46		5.0	86	21/64	8.3	117		12.5	151
	1.8	46		5.1	86		8.4	117	1/2	12.7	151
	1.9	46	13/64	5.2	86		8.5	117		13.0	151
2/64	2.0	49		5.3	86		8.6	117		13.5	160
	2.1	49		5.4	93	11/32	8.7	125		14.0	160
	2.2	53		5.5	93		8.8	125		14.5	169
	2.3	53	7/32	5.6	93		8.9	125		15.0	169
3/32	2.4	57		5.7	93		9.0	125		15.5	178
	2.5	57		5.8	93	23/64	9.1	125		16.0	178
	2.6	57		5.9	93		9.2	125		16.5	184
	2.7	61	15/64	6.0	93		9.3	125		17.0	184
7/64	2.8	61		6.1	101		9.4	125		17.5	191
	2.9	61		6.2	101	3/8	9.5	125		18.0	191
	3.0	61		6.3	101		9.6	133		18.5	198
	3.1	65	1/4	6.4	101		9.7	133		19.0	198
1/8	3.2	65		6.5	101		9.8	133		19.5	205
	3.3	65		6.6	101	25/64	9.9	133		20.0	205
	3.4	70		6.7	101		10.0	133			
	3.5	70	17/64	6.8	109		10.1	133			
9/64	3.6	70		6.9	109		10.2	133			

PACKED IN PLASTIC BOXES - Up to Ø9.5 or 3/8" in 10s - From Ø9.6 in 5s