


Sheet Metal Working Screw

BRIGHT ZINC-PLATED STEEL, SELF-DRILLING SCREW, HEXAGONAL HEAD

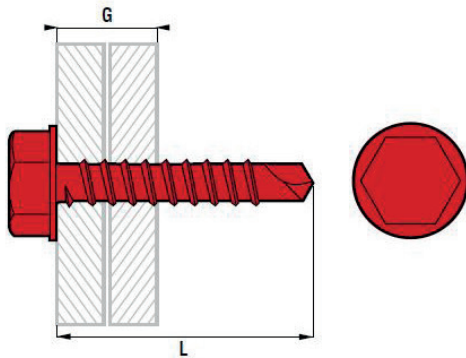

Ø	L	G	Art. number
Diameter	mm	mm	
3.5	10	4	THT5-35010
	13	7	THT5-35013
	16	10	THT5-35016
	19	13	THT5-35019
	25	19	THT5-35025
3.9	13	7	THT5-39013
	16	10	THT5-39016
	19	13	THT5-39019
4.2	13	6	THT7-42013
	16	9	THT7-42016
	19	12	THT7-42019
	22	15	THT7-42022
	25	18	THT7-42025
4.8	32	25	THT7-42032
	13	4	THT8-48013
	16	7	THT8-48016
	19	10	THT8-48019
	22	13	THT8-48022
	25	16	THT8-48025
5.5	32	23	THT8-48032
	38	29	THT8-48038
	45	36	THT8-48045
	50	41	THT8-48050
	19	9	THT8-55019
	22	12	THT8-55022
	25	15	THT8-55025
	32	22	THT8-55032
6.3	38	28	THT8-55038
	45	35	THT8-55045
	50	40	THT8-55050
	63	53	THT8-55063
	75	65	THT8-55075

Ø	L	G	Art. number
Diameter	mm	mm	
6.3	19	8	THT10-63019
	22	11	THT10-63022
	25	14	THT10-63025
	32	21	THT10-63032
	38	27	THT10-63038
	45	34	THT10-63045
	50	39	THT10-63050
	63	52	THT10-63063
	75	64	THT10-63075
	100	89	THT10-63100
	125	114	THT10-63125
	150	139	THT10-63150

Specification

Ø	A/F	hole diameter	shear	tensile	torque	max rpm
Diameter		mm	N	N	N.m	tr/min
3.5	5.5	2.0	2 930	5 000	2 800	2 500
3.9	5.5	2.5	3 650	6 000	3 800	2 500
4.2	7.0	3.0	4 360	7 000	4 800	2 500
4.8	8.0	4.0	6 280	10 000	7 000	2 000
5.5	8.0	5.0	8 360	12 500	10 500	1 750
6.3	10.0	6.0	12 770	17 000	17 000	1 500

PLASTIC COVER CAPS

- For hexagon head screws Ø4.8, Ø5.5 ou Ø6.3 mm.
- White available from stock and other colours are available on demand



Ø _{screw}	Ø hex	Ø collar	to suit A/F	Art. number
mm	mm	mm	mm	
4.8-5.5	9	18	8	CAPM
6.3	11	20	10	CAGM