


# FTRE - STEEL HALF HEXAGON REDUCED IMPERIAL HOLE INSERT

Insert / half hexagon. Reduced countersunk head. Steel + zinc plated.

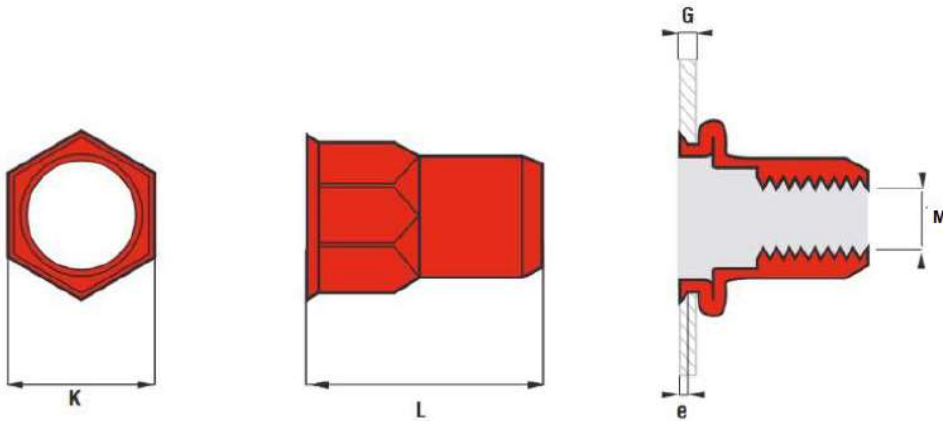

PART NO/REF	M	⬡	K	L	e	G
	Ø (mm)	(mm)	(mm)	(mm)	(mm)	min-max(mm)
FTRE0425	M4	6.4	7.4	10.5	0.5	0.5-2.0
FTRE0525	M5	7.2	8.2	12.0	0.5	0.5-2.5
FTRE0630	M6	9.6	10.6	15.0	0.6	1.0-3.0
FTRE0825	M8	10.6	11.6	16.5	0.6	1.0-3.5

	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
M (mm)	(Nm)	(N)	(N)
M4	5.0	6000	1900
M5	10.3	10 800	2400
M6	15.0	20 000	3000
M8	24.8	28 000	4400