


# HHCR - STEEL HALF HEXAGON REDUCED INSERT

Insert / half hexagon. Reduced countersunk head. Steel + zinc plated.

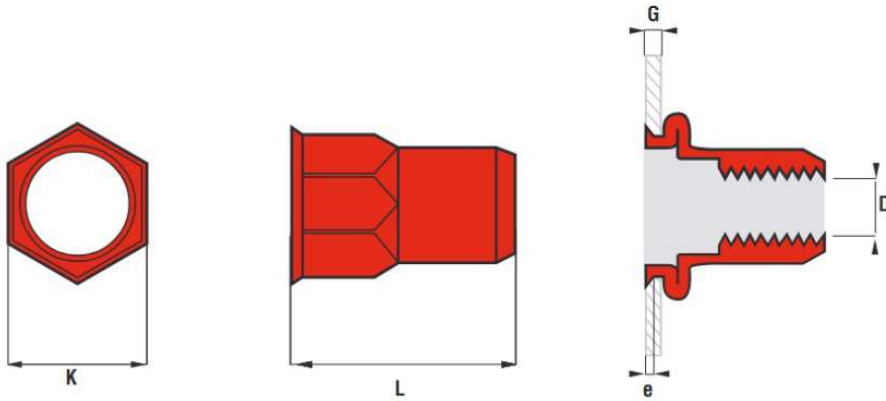

PART NO/REF	M	Hexagon		K	L	e	G
	Ø (mm)	Min(mm)	Max(mm)	(mm)	(mm)	(mm)	min-max (mm)
HHCR0425	M4	5.9	6.3	7.0	12.5	0.8	0.5-3.0
HHCR0525	M5	6.9	7.3	8.0	14.0	0.8	0.5-3.0
HHCR0625	M6	8.9	9.3	10.0	14.5	0.8	0.5-3.0
HHCR0825	M8	10.9	11.3	12.0	17.0	0.8	0.5-3.0
HHCR0855	M8	10.9	11.3	12.0	19.0	0.8	3.0-5.5
HHCR1045	M10	12.9	13.3	14.5	20.5	0.8	0.8-4.0

	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
M (mm)	(Nm)	(N)	(N)
M4	5.0	6000	1 900
M5	10.3	10 800	2 400
M6	15.0	20 000	3 000
M8	24.8	28 000	4 400
M10	37.0	35 000	5 300