


# TCR-P STEEL PLAIN BODY REDUCED HEAD INSERT

Insert. Reduced countersunk head. Steel + zinc plated.

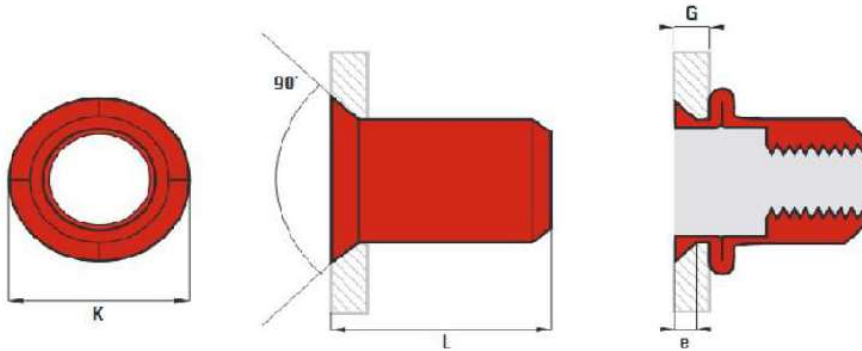

PART NO/REF	M	Hole		K	e	L	G
	Ø (mm)	Min (mm)	Max (mm)				
TCR0430P	M4	5.8	6.2	7.0	0.5	10.0	0.5-3.0
TCR0530P	M5	6.8	7.2	8.0	0.5	11.5	0.5-3.0
TCR0630P	M6	8.8	9.2	10.0	0.6	14.0	0.5-3.0
TCR0830P	M8	10.8	11.2	12.0	0.6	15.5	0.5-3.0

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
M (mm)	(mm)	(Nm)	(N)	(N)
M4	6.0	4.0	7 300	1 600
M5	7.0	5.0	11 450	2 200
M6	9.0	15.0	16 900	2 400
M8	11.0	18.0	24 200	2 900