


TURBO PLUS

Hammer Fixing - Nylon Plug with Polyamide nail

Anti-corrosion

CHARACTERISTICS

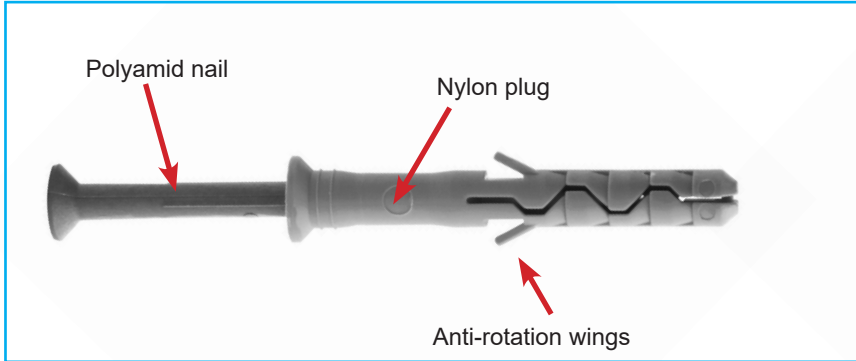

BENEFITS



- Suitable for coastal / wet environments.
- Ideal economic alternative to the stainless steel nail anchor.
- Multiple applications (batten wood, rails, little appliances etc).
- Optimal behaviour in temperatures -40°C to 80°C.
- Low weight for easy transportation.
- Non conductive.

TECHNICAL DATA

		Length	Maximum fix thickness	Drill hole diameter	Drill hole depth	Permissible loads
	Ref TURBOPLUS	L (mm)	t _{fix} (mm)	d _{cut} (mm)	h (mm)	⚖ (kg)
Ø5.0	TPPLUS5030-BC	30	5	5	35	30
	TPPLUS5040-BC	40	10		50	40
	TPPLUS5050-BC	50	20		60	40
Ø6.0	TPPLUS6040-BC	40	10	6	50	50
	TPPLUS6060-BC	60	30		70	60
	TPPLUS6080-BC	80	50		90	60
Ø8.0	TPPLUS8060-BC	60	20	8	70	80
	TPPLUS8080-BC	80	40		90	80
	TPPLUS8100-BC	100	60		110	85
Ø5.0	TFPLUS5030-BC	30	5	5	35	30
	TFPLUS5040-BC	40	10		50	40
	TFPLUS5050-BC	50	20		60	40
Ø6.0	TFPLUS6040-BC	40	10	6	50	50
	TFPLUS6060-BC	60	30		70	60
	TFPLUS6080-BC	80	50		90	60
Ø8.0	TFPLUS8060-BC	60	20	8	70	80
	TFPLUS8080-BC	80	40		90	80
	TFPLUS8100-BC	100	60		110	85

TURBO PLUS

Hammer Fixing - Nylon Plug with Polyamide nail

Anti-corrosion

Packaging

Réf	DESIGNATION DESCRIPTION	QTE BOITE QTY PER BOX	QTE PAR CARTON QTY PER CARTON	GENCOD
TPPLUS5030-BC	CHEVILLE CLOU POLYAMIDE TP Ø5X30 mm	200	800	3553975450211
TPPLUS5040-BC	CHEVILLE CLOU POLYAMIDE TP Ø5X40 mm	200	800	3553975450228
TPPLUS5050-BC	CHEVILLE CLOU POLYAMIDE TP Ø5X50 mm	200	800	3553975450235
TPPLUS6040-BC	CHEVILLE CLOU POLYAMIDE TP Ø6X40 mm	200	800	3553975450242
TPPLUS6060-BC	CHEVILLE CLOU POLYAMIDE TP Ø6X60 mm	100	400	3553975450259
TPPLUS6080-BC	CHEVILLE CLOU POLYAMIDE TP Ø6X80 mm	100	400	3553975450266
TPPLUS8060-BC	CHEVILLE CLOU POLYAMIDE TP Ø8X60 mm	100	400	3553975450273
TPPLUS8080-BC	CHEVILLE CLOU POLYAMIDE TP Ø8X80 mm	100	400	3553975450280
TPPLUS8100-BC	CHEVILLE CLOU POLYAMIDE TP Ø8X100 mm	100	400	3553975450297
TFPLUS5030-BC	CHEVILLE CLOU POLYAMIDE TF Ø5X30 mm	200	800	3553975450303
TFPLUS5040-BC	CHEVILLE CLOU POLYAMIDE TF Ø5X40 mm	200	800	3553975450310
TFPLUS5050-BC	CHEVILLE CLOU POLYAMIDE TF Ø5X50 mm	200	800	3553975450327
TFPLUS6040-BC	CHEVILLE CLOU POLYAMIDE TF Ø6X40 mm	200	800	3553975450334
TFPLUS6060-BC	CHEVILLE CLOU POLYAMIDE TF Ø6X60 mm	100	400	3553975450341
TFPLUS6080-BC	CHEVILLE CLOU POLYAMIDE TF Ø6X80 mm	100	400	3553975450358
TFPLUS8060-BC	CHEVILLE CLOU POLYAMIDE TF Ø8X60 mm	100	400	3553975450365
TFPLUS8080-BC	CHEVILLE CLOU POLYAMIDE TF Ø8X80 mm	100	400	3553975450372
TFPLUS8100-BC	CHEVILLE CLOU POLYAMIDE TF Ø8X100 mm	100	400	3553975450389

