


# SELF DRILLING SCREWS FOR STEEL

A2 STAINLESS STEEL/STEEL TIP, HEX HEAD



A2 stainless steel Body and head - for long life without corrosion





Hardened steel tip for effortlessly drilling through steel.




	Product code	Thread Diameter mm	Length mm	Head size (SW)	Point Type	STEEL THICKNESS mm(CP)	Max Fixture Thickness mm (CA)	Washer Diameter mm (R)
<b>Steel capacity - 2 x 0.9 mm</b>								
	BMTH63025P2-R16-100	6.3	25	8	1	2 X 0.9	-	16
<b>Steel capacity - 2 x 1.2 mm</b>								
	BMTH63035P2-R16-100	6.3	35	8	2	2 X 1.2	-	16
<b>Steel capacity - 3.0 mm</b>								
	BMTH55022P3-R16-100	5.5	22	8	3	1.2 - 3.0	2	16
	BMTH55025P3-R16-100	5.5	25	8	3	1.2 - 3.0	7	16
	BMTH55032P3-R16-100	5.5	32	8	3	1.2 - 3.0	14	16
	BMTH55038P3-R16-100	5.5	38	8	3	1.2 - 3.0	20	16
	BMTH55050P3-R16-100	5.5	50	8	3	1.2 - 3.0	32	16
<b>Steel capacity - 3.0 mm - no washer</b>								
	BMTH55022P3-100	5.5	22	8	3	1.3 - 3.0	2	-
	BMTH55025P3-100	5.5	25	8	3	1.3 - 3.0	7	-
	BMTH55032P3-100	5.5	32	8	3	1.3 - 3.0	14	-
	BMTH55038P3-100	5.5	38	8	3	1.3 - 3.0	20	-
	BMTH55050P3-100	5.5	50	8	3	1.3 - 3.0	32	-

# SELF DRILLING SCREWS FOR STEEL


A2 STAINLESS STEEL/STEEL TIP, HEX HEAD

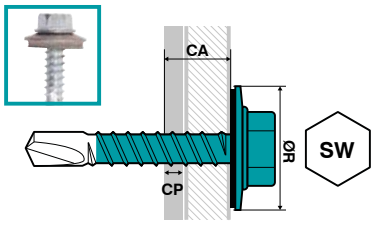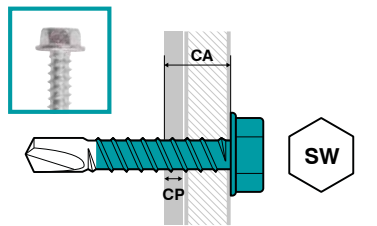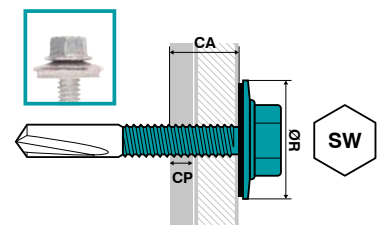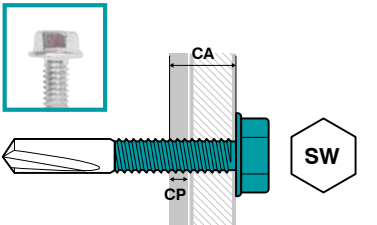	Product code	Thread Diameter mm	Length mm	Head size (SW)	Point Type	STEEL THICKNESS mm(CP)	Max Fixture Thickness mm (CA)	Washer Diameter mm (R)
<b>Steel capacity - 6.0 mm</b>								
	BMTH55025P6-R16-100	5.5	25	8	4	2.0 - 6.0	5	16
<b>Steel capacity - 6.0 mm - no washer</b>								
	BMTH55025P6-100	5.5	25	8	4	2.0 - 6.0	5	-
<b>Steel capacity - 12.5 mm</b>								
	BMTH55038P12-R16-100	5.5	38	8	5	4.0 - 12.5	8	16
	BMTH55050P12-R16-100	5.5	50	8	5	4.0 - 12.5	20	16
<b>Steel capacity - 12.5 mm - no washer</b>								
	BMTH55038P12-100	5.5	38	8	5	4.0 - 12.5	8	-
	BMTH55050P12-100	5.5	50	8	5	4.0 - 12.5	20	-


## APPLICATION EXAMPLES




Steel capacity - 1.2 mm



Steel capacity - 3 mm



Steel capacity - 6 mm



Steel capacity - 12.5 mm