


NEW GENERATION LEVER TOOL FOR RIVET NUTS M4 - M10 - WITH QUICK UNSCREW

N300-T

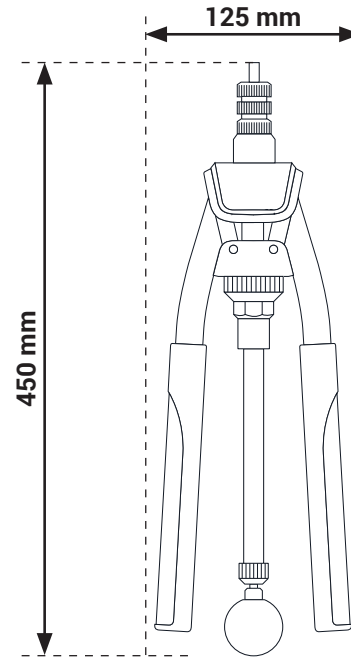

weight = 1,62kg

FEATURES

1. Professional lever tool for rivet nuts
2. Geared transmission: 3x less effort than standard tools
3. Quick release rod (N300-T version)
4. 5 mandrels and nosepieces supplied:
M4-M5-M6-M8-M10
5. Materials:
body and levers = steel
grip handle = ABS
6. 1 year warranty

CAPACITY

RIVET NUTS	M4	M5	M6	M8	M10
ALUMINIUM	✓	✓	✓	✓	✓
STEEL	✓	✓	✓	✓	✓
STAINLESS STEEL	✓	✓	✓	✓	✓

PACKAGING



Cardboard box : 505x185x45mm
Reference : **N300-T**



Aluminium box : 535x220x45mm
Reference : **N300-T-S**

Included :


1. 1 N300-T tool
2. 5 mandrels and M4 - M10 nose pieces
3. Assortment of nuts (N300-T-S kit version)

MANUAL


Installing the rivet nut



Fit the mandrel and nose that corresponds to the diameter of the rivet nut (M4, M5, M6, M8 or M10).

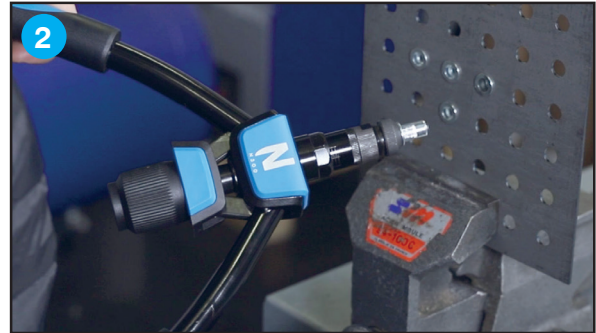


Fully spread the arms of the N300 and fit the rivet nut onto the mandrel as far as the anvil (nose cone).

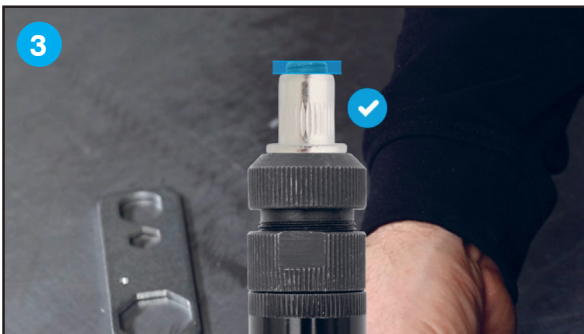


Advice: Let the mandrel protrude slightly to guarantee a good connection of the mandrel and rivet nut



To adjust the stroke: loosen the retaining nut then turn the anvil and sleeve parts to increase/reduce the stroke (possible adjustment from 1 to 10mm). Then retighten. Diagram shows the ideal rivet nut deformation.

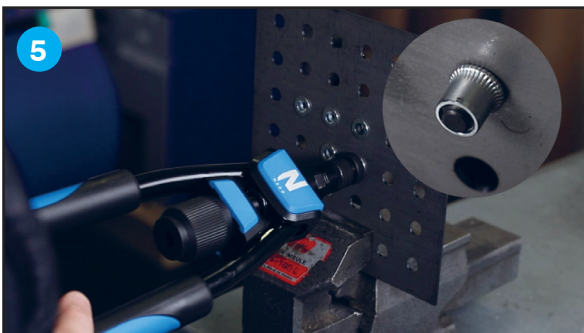

Setting the nut:
Insert the rivet nut in the plate drilling hole. Close the arms of the tool to set the rivet nut.

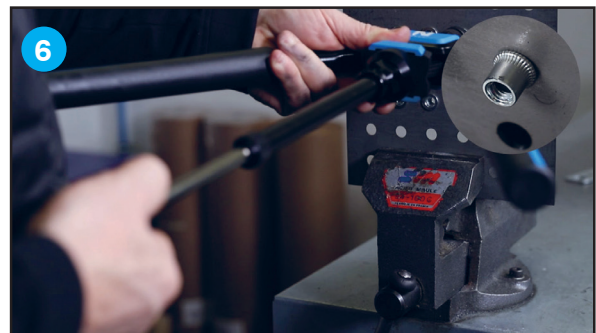

Remove the tool:
open arms
Pull the quick release rod to remove the N300-T tool

How to change the nosepieces and jaws.



[Watch the video](#)