


WAK CLOSED END 3.2/4.0/4.8




WAK3.2-4.8FICHE

ENGLISH
Mandrel : Steel
Body : Aluminium
Countersunk head

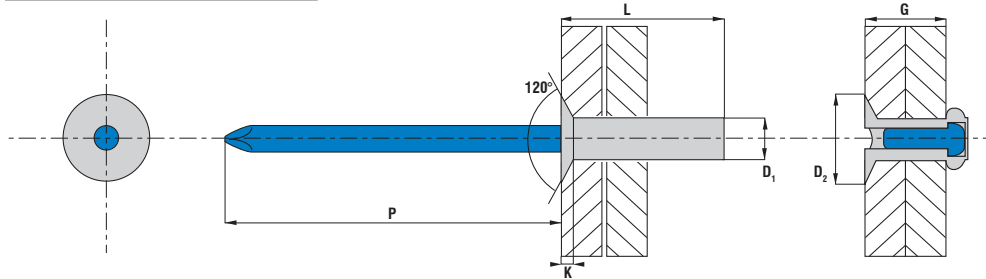

PART NO/REF	D ₁	L	D ₂	K	Hole diameter	P	G
	Ø (mm)	(mm)+1.0 / -0.2	Ø (mm)	(mm)	Ø (mm)	mini (mm)	min-max (mm)
WAK3207	3.2 +0.08 / -0.10	7.5	6.0 ±0.4	-	1.7	26	1.5-3.0
WAK3209		9.0					3.0-4.5
WAK3212		12.0					6.0-7.5
WAK4009	4.0 +0.08 / -0.15	9.5	7.5 ±0.5	-	2.2	27	2.5-4.5
WAK4012		12.5					6.5-8.0
WAK4014		14.0					8.0-9.5
WAK4809	4.8 +0.08 / -0.15	9.5	9.0 ±0.5	-	2.6	27	3.0-4.5
WAK4812		12.5					6.0-7.5
WAK4814		14.0					7.5-9.0
WAK4815		15.5					9.0-10.5
WAK4819		19.0					10.5-14.0

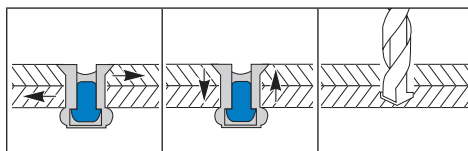

D ₁ (mm)	(N)	(N)	Ø (mm)
3.2	1 070	1 245	3.3
4.0	1 710	2 240	4.1
4.8	2 230	3 070	4.9

UNIT PLANT CERTIFICATES



ISO 9001:2000
TS 16949